

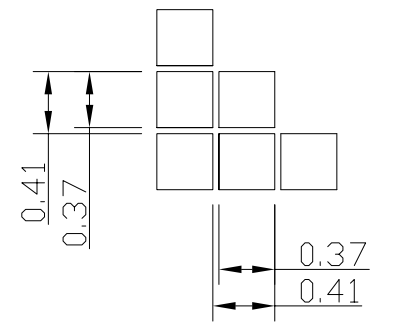



FFC Terminal	
No.	Pin Name
1	VSS
2	VDD
3	V0
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	CS1
16	CS2
17	/RST
18	VOUT
19	BLA
20	BLK



Pixels Details  
Scale=20/1

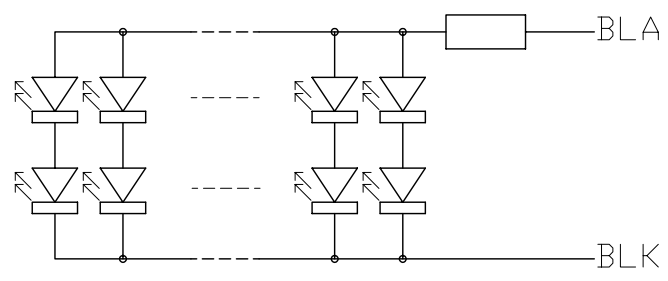

Backlight Circuit  
(No. of LEDs = 2x18pcs)  
Scale=free

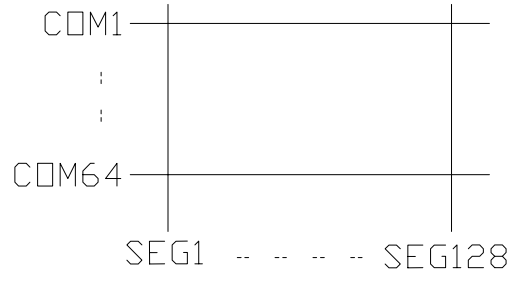

Panel Wiring Details  
Scale=free

- Note:
- \*1. LCD Display Type : STN-YG, Positive, Transflective
  - \*2. Viewing Direction : 6H
  - \*3. Duty : 1/64
  - \*4. Operating Voltage : 5V
  - \*5. Backlight Color : YG
  - \*6. Operating Temperature : -20°C ~ 70°C
  - \*7. Storage Temperature : -30°C ~ 80°C
  - \*8. A VR(25k to 50k) must be connected externally for contrast control

C		
B		
A	Typing Correction	Linyan 2006-11-11 Date
Rev	Note	Date
Dwg Title	LM12864MBC Outline Dwg	
Dwg No.	MK-000942a-1-1	Date 2005-05-21
Scale	2/1	Tol. ±0.5
Unit	mm	Paper Size A3
Approved	Checked	Drawn Kenny Yuen

**TOPWAY**