



K2 Terminal	
No.	Pin Name
1	FLM
2	LP
3	CP
4	M
5	V0
6	VDD
7	VSS
8	VDUT
9	XD0
10	XD1
11	XD2
12	XD3
13	/DISPOFF
14	NC
15	BLA
16	BLK




Pixels Details
Scale=20/1

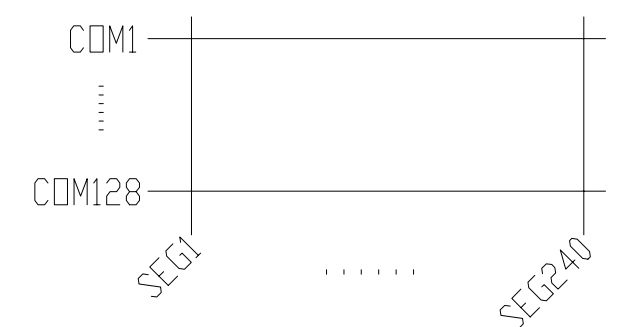

Wiring Details(Top View)
Scale=Free

- Note:
- *1. Display Type : FSTN, Positive, Transflective
 - *2. Viewing Direction : 6H
 - *3. Duty : 1/128, Bias : 1/12
 - *4. Backlight Color : White
 - *5. Operating Voltage : 5.0V
 - *6. Operating Temperature : -20°C~70°C
 - *7. Storage Temperature : -30°C~80°C
 - *8. An external VR(25K to 50K) must be connected for Contrast Control

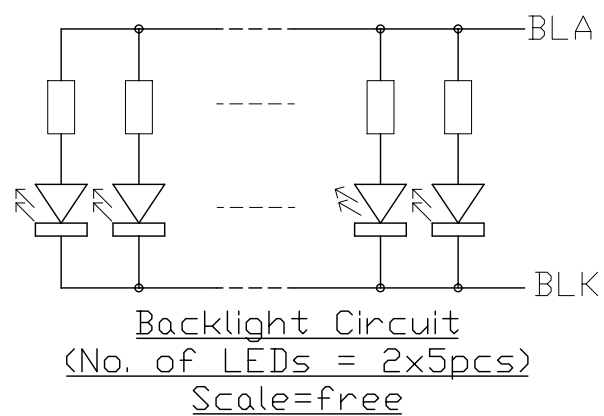

C		
B		
A		
Rev	Note	Date
Dwg Title LM240128NCC Outline Dwg		
Dwg No.	MK-001149-1-1	Date 2006-01-13
Scale 6/5	Tol. ±0.5	Unit mm Paper Size A3
Approved	Checked	Drawn Li Shuai
TOPWAY		