



深圳市拓普微科技开发有限公司
SHENZHEN TOPWAY TECHNOLOGY CO., LTD.

LM12832BCW-1

LCD Module User Manual

Prepared by: Luo Lin Date: 2021-03-23	Checked by: Date:	Approved by: Date:
---	----------------------------------	-----------------------------------

Rev.	Descriptions	Release Date
0.1	Preliminary release	2021-03-23

Table of Content

1. Basic Specifications.....	3
1.1 Display Specifications.....	3
1.2 Mechanical Specifications.....	3
1.3 Block Diagram.....	3
1.4 Terminal Functions.....	4
1.5 Backlight Functions.....	4
2. Absolute Maximum Ratings.....	5
3. Electrical Characteristics.....	5
3.1 DC Characteristics.....	5
3.2 LED Backlight Circuit Characteristics.....	5
3.3 AC Characteristics.....	6
3.4 Reset Timing.....	6
4. Function specifications.....	7
4.1 Adjusting the Display Contrast.....	7
4.2 Application circuit(Example).....	7
4.3 The Serial Interface.....	7
4.4 Basic Setting.....	7
4.5 Resetting the LCD module.....	8
4.6 Display Memory Map.....	8
4.7 Display Commands.....	9
4.8 Display Commands (continue).....	10
5. Design and Handling Precaution.....	11

1. Basic Specifications

1.1 Display Specifications

- 1) LCD Display Mode : FSTN, Positive, Transflective
- 2) Display Color : Display Data = "1" : Dark Gray(*1)
: Display Data = "0" : Light White (*2)
- 3) Viewing Angle : 6H
- 4) Driving Method : 1/33 duty, 1/6 bias

Note:

*1. Color tone may slightly change by Temperature and Driving Condition.


*2. The Color is defined as the inactive / background color

*3. Fine Contrast adjustment function is necessary in the application design for optimal display result

1.2 Mechanical Specifications

- 1) Outline Dimension : 58.8 x 26.3 x 9.8 (mm) (exclude FPC terminal)
(See attached Outline Drawing for details)

1.3 Block Diagram

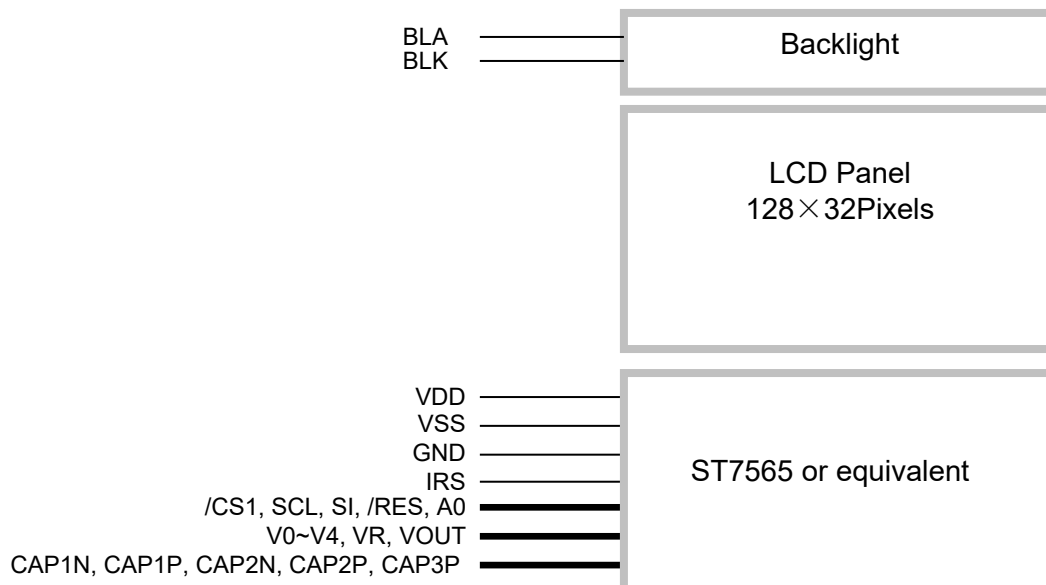

1.4 Terminal Functions

PIN NO	PIN Name	I/O	Descriptions
1	GND	Supply	Connect to VSS
2	/CS1	Input	Chip Select /CS=L, enable access to the LCD module /CS=H, disable access to the LCD module
3	/RES	Input	Reset signal /RES = L, Initialization is executed /RES = H, Normal running.
4	A0	Input	Register Select A0 = H, Transferring the Display Data A0 = L, Transferring the Control Data
5	SCL	I/O	Serial clock input
6	SI	I/O	Serial data input
7	VDD	Supply	Positive power supply
8	VSS	Supply	Negative power supply, 0V
9	VOOUT	--	Power Booster Circuit Output
10	CAP3P	--	Power Booster Circuit Capacitance terminals
11	CAP1N	--	
12	CAP1P	--	
13	CAP2P	--	
14	CAP2N	--	
15	V4	--	LCD driving voltage supply terminals
16	V3	--	
17	V2	--	
18	V1	--	
19	V0	--	
20	VR	Input	Power Booster Resistor ratio reference input
21	IRS	Input	Select the resistors for the V0 voltage level adjustment IRS=H, Using the internal resistors IRS=L, Not using the internal resistor, the V0 voltage level is regulated by an external resistive voltage divider attached to the VR Terminal
22	GND	Supply	Connect to VSS

1.5 Backlight Functions

PIN NO	PIN Name	I/O	Descriptions
1	BLA	Supply	Backlight Positive power supply
2	BLK	Supply	Backlight Negative power supply

2. Absolute Maximum Ratings

Items	Symbol	Min.	Max.	Unit	Condition
Supply Voltage	V_{DD}	-0.3	+3.3	V	$V_{SS} = 0V$
Input Voltage	V_{IN}	-0.3	$V_{DD}+0.3$	V	$V_{SS} = 0V$
Operating Temperature	T_{OP}	-20	+70	°C	No Condensation
Storage Temperature	T_{ST}	-30	+80	°C	No Condensation

Cautions:

Any Stresses exceeding the Absolute Maximum Ratings may cause substantial damage to the device. Functional operation of this device at other conditions beyond those listed in the specification is not implied and prolonged exposure to extreme conditions may affect device reliability.

3. Electrical Characteristics

3.1 DC Characteristics

$V_{SS}=0V$, $V_{DD}=3.0V$, $T_{OP}=25^{\circ}C$

Items	Symbol	MIN.	TYP.	MAX.	Unit	Condition / Application Pin
Operating Voltage	V_{DD}	2.8	3.0	3.3	V	VDD
Input High Voltage	V_{IH}	$0.8 \times V_{DD}$	-	V_{DD}	V	/RES, /CS1, A0,
Input Low Voltage	V_{IL}	V_{SS}	-	$0.2 \times V_{DD}$	V	SCL, SI
Operating Current	I_{DD}	-	0.2	0.5	mA	VDD


3.2 LED Backlight Circuit Characteristics

$V_{BLK}=0V$, $I_{fBLA}=29mA$, $T_{OP}=25^{\circ}C$


Items	Symbol	MIN.	TYP.	MAX.	Unit	Applicable Pin
Forward Voltage	V_{fBLA}	-	3.3	-	V	BLA
Forward Current	I_{fBLA}	-	29	51	mA	BLA

Cautions:

Exceeding the recommended driving current could cause substantial damage to the backlight and shorten its lifetime.

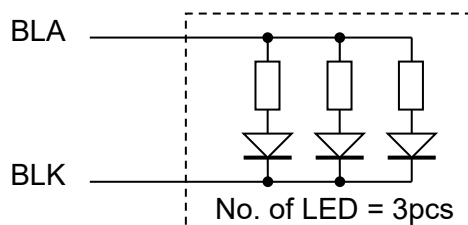

3.3 AC Characteristics

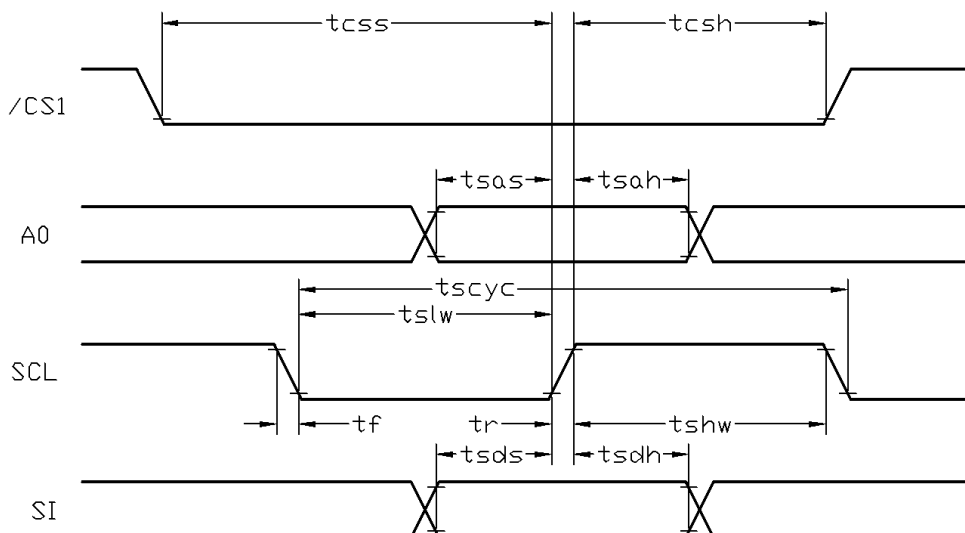

$V_{SS}=0V, V_{DD}=3.0V, T_{OP}=25^{\circ}C$

Item	Symbol	MIN.	TYP.	MAX.	Unit
Serial Clock Period	tscyc	125	-	-	ns
Address setup time (A0)	tsas	38	-	-	ns
Address hold time (A0)	tsah	25	-	-	ns
SCL "H" pulse width	tshw	63	-	-	ns
SCL "L" pulse width	tslw	63	-	-	ns
Data setup time	tsds	38	-	-	ns
Data hold time	tsdh	25	-	-	ns
CS-SCL time	tcss	38	-	-	ns
CS-SCL time	tcsh	75	-	-	ns


Note:

*1. Input signal rise/fall time should be less than 15ns .

*2. CL=100pF

*3.All timing is using 20% and 80% of VDD as the reference.

3.4 Reset Timing

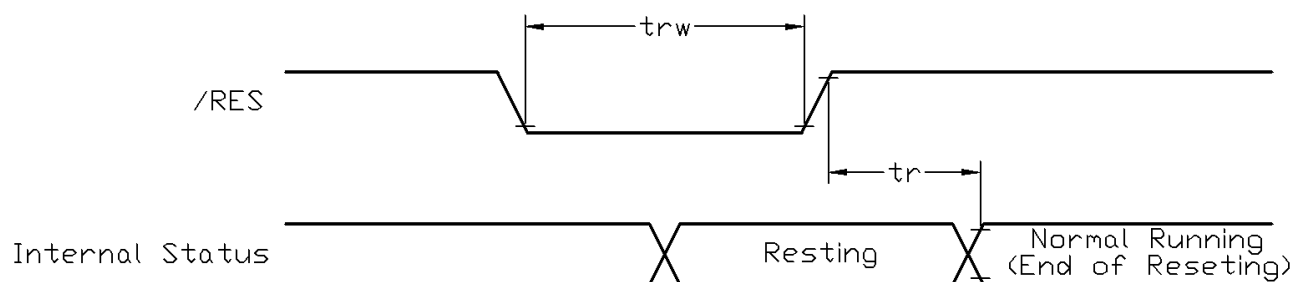

$V_{SS}=0V, V_{DD}=3.0V, T_{OP}=25^{\circ}C$

Item	Symbol	MIN.	TYP.	MAX.	Unit
Reset time	tr	-	-	2.5	μs
Reset LOW pulse width	trw	2.5	-	-	μs

Note:

*1.All timing is using 20% and 80% of VDD as the reference.

4. Function specifications

4.1 Adjusting the Display Contrast


- This LCD module equipped with latest digital contrast adjustment function.
- Its display contrast could be adjusted by MCU command. (please see the command tables for details)
- It is recommended to provide a contrast adjustment interface for end-user, where the best display result could meet the individual preference in mass production.

4.2 Application circuit(Example)

- 3x boosting
-
- 4-Wire SPI mode
- Using internal ref resistor
- C1~C5=1.0μF (25V)
- C6~C8=1.0μF (25V)


Note:

Please refer to the ST7565 data sheet for details

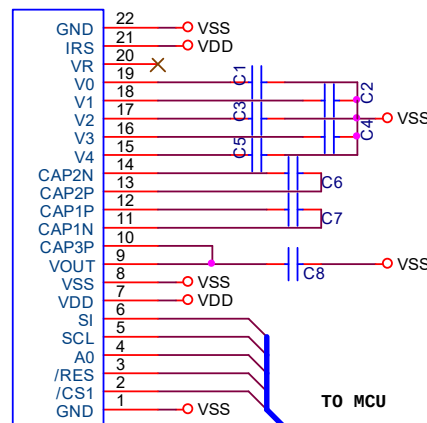

4.3 The Serial Interface

When the serial interface has been selected then when the chip is in active state the serial data input(SI) and the serial clock(SCL) can be received. The serial data is read from the serial data input pin in the rising edge of the serial clock . When “A0”=“H”, the data is display data, and when “A0”=“L”, the data is command.

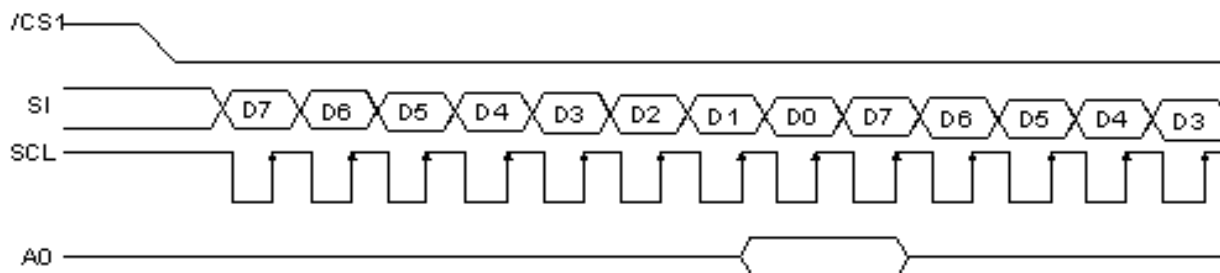

4.4 Basic Setting

To drive the LCD module correctly and provide normally display, please use the following setting

- ADC = 0 (normal)
- SHL select = 1 (reverse)
- LCD Bias Select = 1/6
- Initial Display Line = 0
- Entire Display ON/OFF = OFF (normal)
- Reverse Display ON/OFF = OFF (normal)
- Set Power Control Set:
 - voltage follower = ON, voltage converter = ON, voltage regulator = ON
- Booster Set = 3x
- Display ON/OFF = ON

Note:

*1. These setting/commands should issue the LCD module while start up.

*2. See the Display Commands section for details.

4.5 Resetting the LCD module

The LCD module should be initialized by using /RES terminal.

While turning on the VDD and VSS power supply, maintain /RES terminal at LOW level. After the power supply stabilized, release the reset terminal (/RES=HIGH)

4.6 Display Memory Map

Page address	data	LCD Display (front view)		
0	D0 : D7			
1	D0 : D7			
2	D0 : D7			
3	D0 : D7			
Column Address		00h	→	7F

Note:

*1. ADC = 0 (normal)

*2. SHL Selection = 1 (reverse)

*3. Initial Display Line = 0

4.7 Display Commands

No.	Instructions	Code												Function
		A0	/RD	/WR	D7	D6	D5	D4	D3	D2	D1	D0		
1	Display ON/OFF	0	1	0	1	0	1	0	1	1	1	DON	DON=0, display off DON=1, display oin	
2	Display start line set	0	1	0	0	1	Display start address					Sets the display RAM display start line address		
3	Set Page Address	0	1	0	1	0	1	1	Page Address				Set the display RAM page address	
4	Set Column Address (Upper-4-bits)	0	1	0	0	0	0	1	Col. Add. Upper				Set the upper-4-bit of column address counter	
	Set Column Address (Lower-4-bits)	0	1	0	0	0	0	0	Col. Add. Lower				Set the lower-4-bit of column address counter	
5	Read Status	0	0	1	Status				0	0	0	0	Read the status data	
6	Write Display Data	1	1	0	Write Data							Write data into the display RAM		
7	Read Display Data	1	0	1	Read Data							Read data form the display RAM		
8	ADC Select	0	1	0	1	0	1	0	0	0	0	ADC	Sets the display RAM address SEG output correspondence ADC= 0,normal . ADC=1, reverse	
9	Normal/Reverse Display	0	1	0	1	0	1	0	0	1	1	REV	REV=0, Normal display REV=1, Reverse display	
10	Entire Display ON/OFF	0	1	0	1	0	1	0	0	1	0	EON	EON=0, Normal display EON=1, Entire display ON	
11	Set LCD Bias	0	1	0	1	0	1	0	0	0	1	BIAS	Set the LCD driving voltage bias BIAS=0, 1/6 BIAS BIAS=1, 1/5 BIAS	
12	Set Read-Modify-Write	0	1	0	1	1	1	0	0	0	0	0	Enter the “Read-Modify-Write” mode column address counter will increase in each “Write Display Data”, and will not increase in each “Read Display Data command”	
13	Reset Read-Modify-Write	0	1	0	1	1	1	0	1	1	1	0	Clear the “Read-Modify-Write” mode	
14	Reset	0	1	0	1	1	1	0	0	0	1	0	Resets the LCD module	
15	SHL Select	0	1	0	1	1	0	0	SHL	*	*	*	Set the COM scanning direction SHL=0, Normal display SHL=1, Flipped in y direction * = don't care terms	
16	Power Control Set	0	1	0	0	0	1	0	1	VC	VR	VF	Set the power circuit operation mode VF: LCD Supply Voltage Follower VR: LCD Supply Voltage Regulator VC: LCD Supply Voltage Converter (1=ON, 0=OFF)	
17	Regulator Resistor Select	0	1	0	0	0	1	0	0	Radio setting			Set the built-in resistor ratio (Rb/Ra)	

Note: *1. Do not use any other command not listed, or the system malfunction may result.
*2. For the details of the Display Commands, please refer to ST7565 data sheet.

4.8 Display Commands (continue)

No.	Instructions	Code											Function
		A0	/RD	/WR	D7	D6	D5	D4	D3	D2	D1	D0	
18	Electronic volume mode set	0	1	0	1	0	0	0	0	0	0	1	Set reference voltage mode
	Electronic volume register set	0	1	0	*	*	Electronic Control value						Set reference voltage register (Display contrast value)
19	Booster Ratio Set	0	1	0	1	1	1	1	1	0	0	0	Select booster ratio
		0	1	0	0	0	0	0	0	0	step		00=2x,3x,4x; 01=5x. 11=6x
20	Power Save	-	-	-	-	-	-	-	-	-	-	-	Compound Instruction: Display OFF + Entire Display ON
21	NOP	0	1	0	1	1	1	0	0	0	1	1	Non-operation command

Note: *1. Do not use any other command not listed, or the system malfunction may result.

*2. For the details of the Display Commands, please refer to ST7565 data sheet.

4.8.1 Power off the LCD Module



It recommends that enter Power Save mode before power off the LCD module.

4.8.2 Refreshing The LCD Module


It recommends that the operating modes and display contents be refreshed periodically to prevent the effect of unexpected noise.

5. Design and Handling Precaution

1. The LCD panel is made by glass. Any mechanical shock (eg. dropping from high place) will damage the LCD module.
2. Do not add excessive force on the surface of the display, which may cause the Display color change abnormally.
3. The polarizer on the LCD is easily get scratched. If possible, do not remove the LCD protective film until the last step of installation.
4. Never attempt to disassemble or rework the LCD module.
5. Only Clean the LCD with Isopropyl Alcohol or Ethyl Alcohol. Other solvents (eg. water) may damage the LCD.
6. When mounting the LCD module, make sure that it is free from twisting, warping and distortion.
7. Ensure to provide enough space (with cushion) between case and LCD panel to prevent external force adding on it, or it may cause damage to the LCD or degrade the display result.
8. Only hold the LCD module by its side. Never hold LCD module by add force on the heat seal or TAB.
9. Never add force to component of the LCD module. It may cause invisible damage or degrade of the reliability.
10. LCD module could be easily damaged by static electricity. Be careful to maintain an optimum anti-static work environment to protect the LCD module.
11. When peeling off the protective film from LCD, static charge may cause abnormal display pattern. It is normal and will resume to normal in a short while.
12. Take care and prevent get hurt by the LCD panel sharp edge.
13. Never operate the LCD module exceed the absolute maximum ratings.
14. Keep the signal line as short as possible to prevent noisy signal applying to LCD module.
15. Never apply signal to the LCD module without power supply.
16. IC chip (eg. TAB or COG) is sensitive to the light. Strong lighting environment could possibly cause malfunction. Light sealing structure casing is recommend.
17. LCD module reliability may be reduced by temperature shock.
18. When storing the LCD module, avoid exposure to the direct sunlight, high humidity, high temperature or low temperature. They may damage or degrade the LCD module

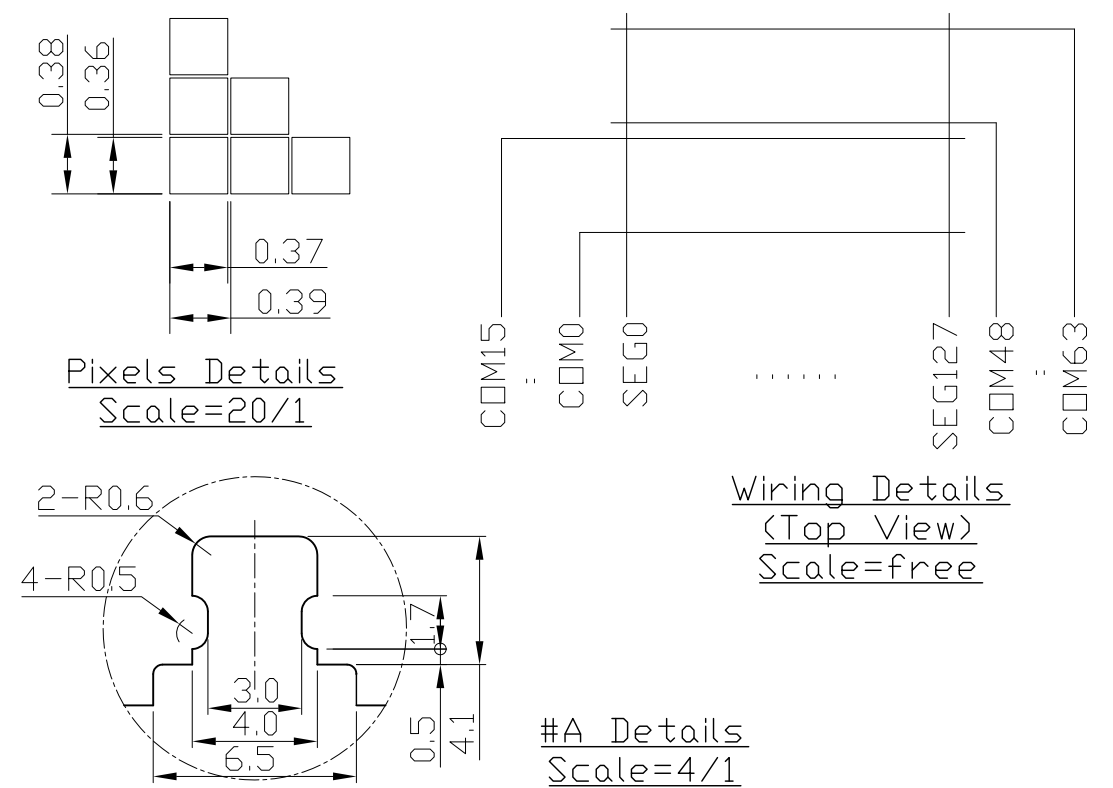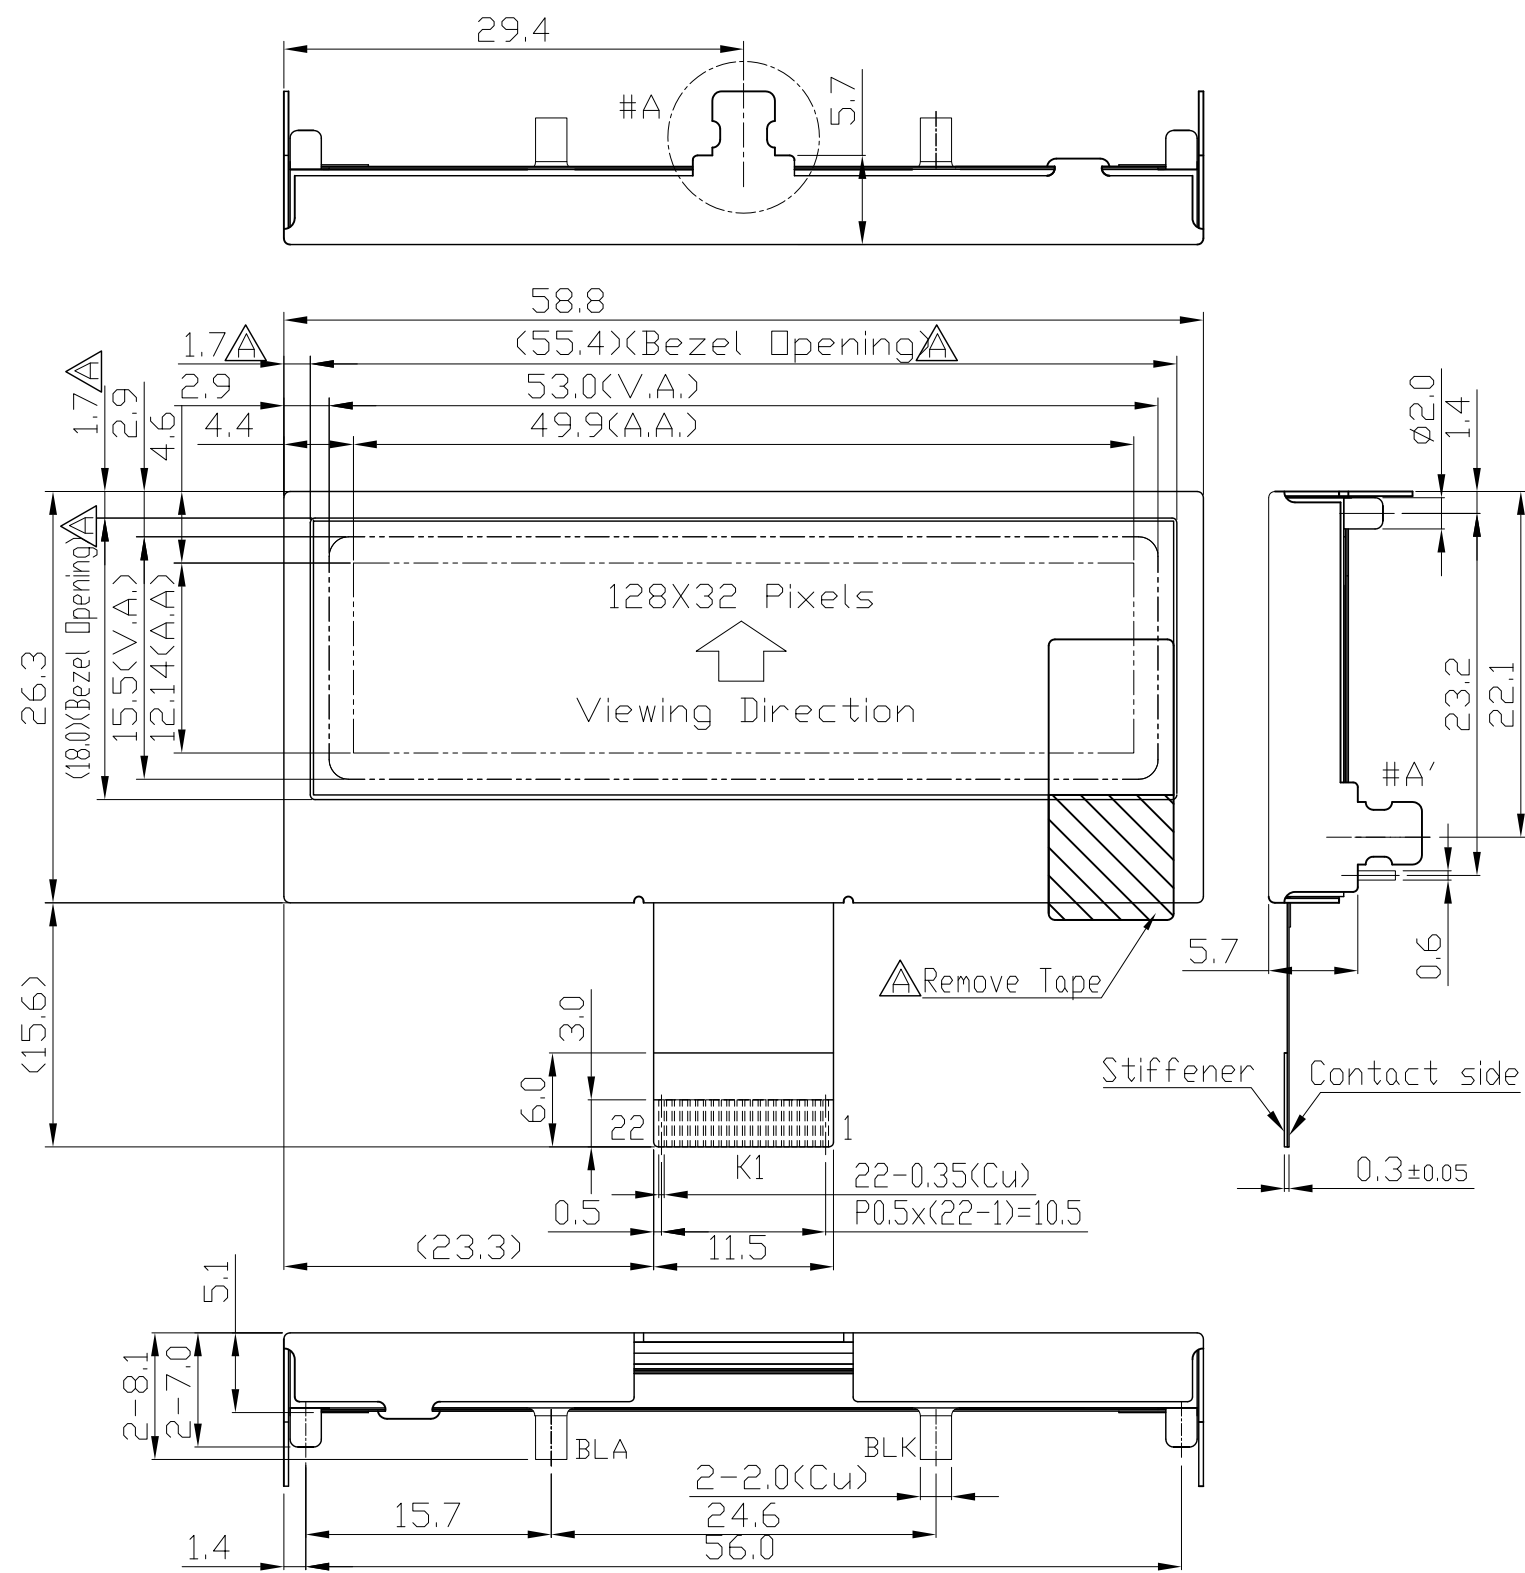


K1 Terminal		
No.	Pin	Name
1		GND
2		/CS1
3		/RES
4		A0
5		SCL
6		SI
7		VDD
8		VSS
9		VOUT
10		CAP3P
11		CAP1N
12		CAP1P
13		CAP2P
14		CAP2N
15		V4
16		V3
17		V2
18		V1
19		V0
20		VR
21		IRS
22		GND

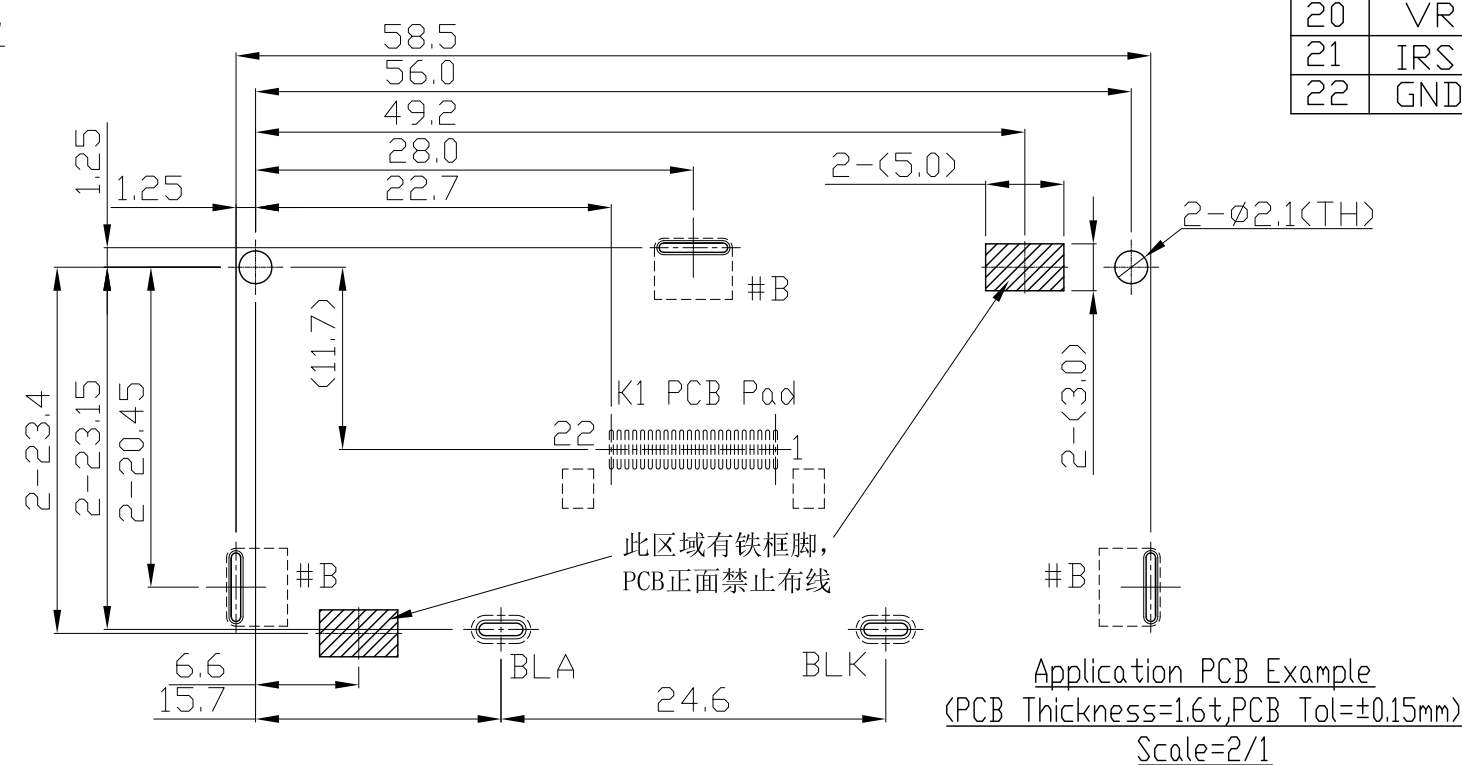

Note:

- *1. Display Type : FSTN, Positive, Transflective
- *2. Viewing Direction : 6H
- *3. Duty : 1/33, Bias : 1/6
- *4. Backlight Color : White
- *5. Backlight Supply : 3.3V TYP.
- *6. Operating Voltage : 3.3V
- *7. Operating Temperature : -20°C~70°C
- *8. Storage Temperature : -30°C~80°C

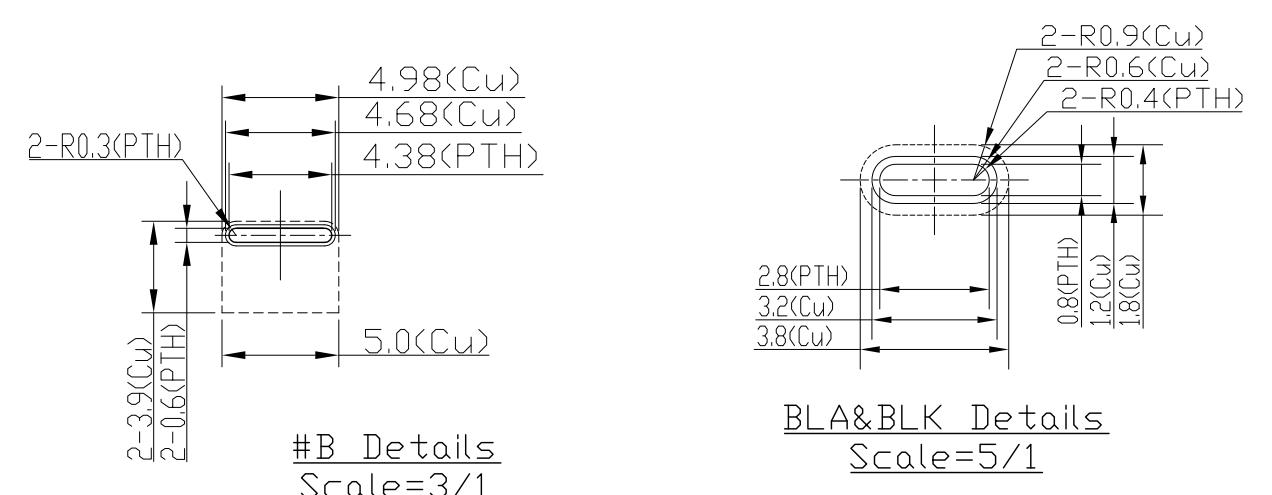

C		
B		
A	-Revise Bezel Opening -Add Remove Tape	luolin 2021-03-16
Rev	Note	Date
Dwg	Title	LM12832BCW-1 Outline Dwg
Dwg No.	MK-007143a-1-1	Date 2020-12-15
Scale	2/1	Tol. ±0.5
Unit	mm	Paper Size A3
Approved	Checked	Drawn Luo Lin
TOPWAY		