
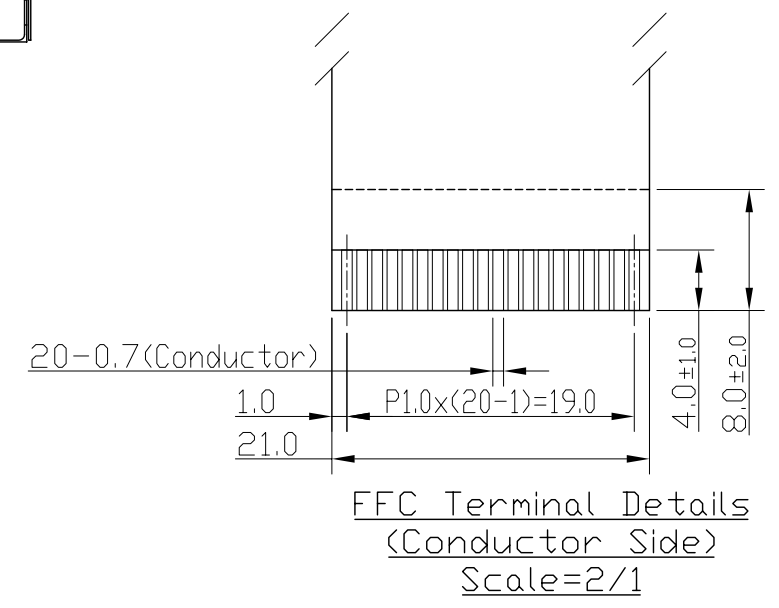


Terminal	
No.	Pin Name
1	VDUT
2	V0
3	VDD
4	VSS
5	/WAIT
6	NC
7	/CS
8	A0
9	/WR(R/W)
10	/RD(E)
11	DB0
12	DB1
13	DB2
14	DB3
15	DB4
16	DB5
17	DB6
18	DB7
19	/RST
20	BLA

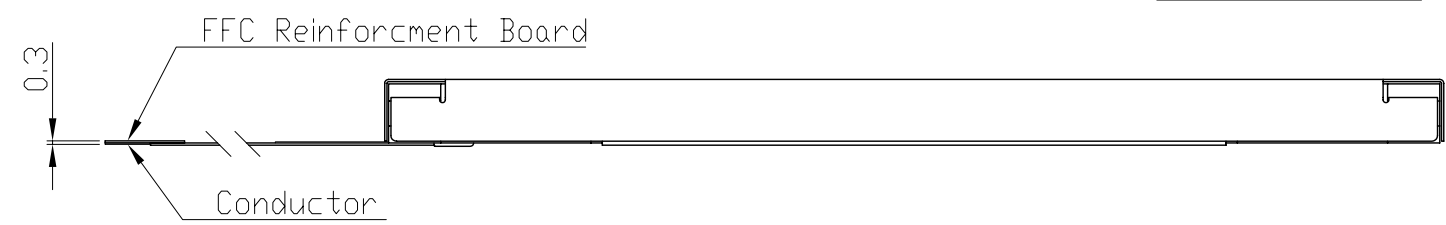

- Note:
- \*1. LCD Display Type : FSTN, Positive, Transflective
  - \*2. Viewing Direction : 6H
  - \*3. Duty : 1/128
  - \*4. Operating Voltage : 3.3V
  - \*5. Backlight Color : White
  - \*6. Backlight Supply : 65mA(3.3V TYP.)
  - \*7. Built in LCD Controller : S1D13700 or equivalent
  - \*8. Operating Temperature : -20°C ~ 70°C
  - \*9. Storage Temperature : -30°C ~ 80°C
  - \*10. An external VR(25k~50k) must be connected for Contrast Control

C		
B		
A		
Rev	Note	Date
Dwg Title		
LM1095E-1 Outline Dwg		
Dwg No.	MK-001772-1-1	Date
2007-05-16		
Scale	Tol.	Unit
3/2	±0.5	mm
Paper Size	A3	
Approved	Checked	Drawn
		Lin Yan

**TOPWAY**