



Pixels Details
Scale=20/1

| Terminal | |
|----------|----------|
| No. | Pin Name |
| 1 | DB7 |
| 2 | DB6 |
| 3 | DB5 |
| 4 | DB4 |
| 5 | DB3 |
| 6 | DB2 |
| 7 | DB1 |
| 8 | DB0 |
| 9 | E |
| 10 | R/W |
| 11 | RS |
| 12 | V0 |
| 13 | VDD |
| 14 | VSS |
| 15 | CSA |
| 16 | CSB |
| 17 | VOUT |
| 18 | RSTB |
| 19 | BLA |
| 20 | BLK |

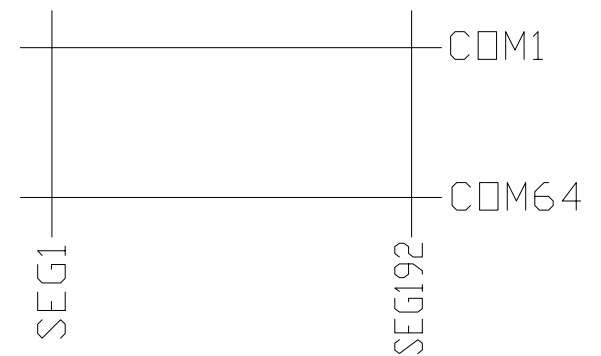

Wiring Details
Scale=free

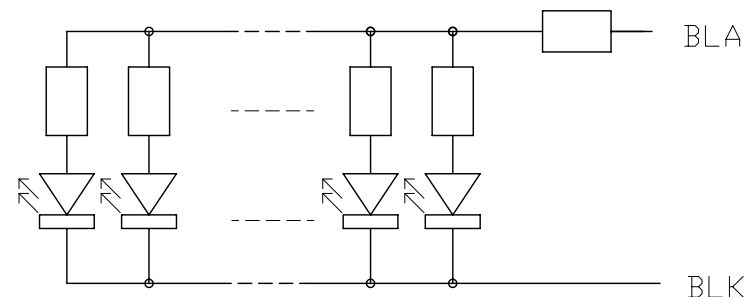

Backlight Circuit
(No. of LEDs = 6pcs)
Scale=free

NOTE:

- *1. LCD Display Type : FSTN, Positive, Transflective
- *2. Viewing Direction : 6H
- *3. Duty : 1/64, Bias : 1/9
- *4. Operating Voltage : 5.0V
- *5. Backlight Color : White
- *6. Backlight Supply : 102mA (5.0V TYP.)
- *7. Operating Temperature : -20°C~70°C
- *8. Storage Temperature : -30°C~80°C
- *9. An external VR(25K to 50K) must be connected for Contrast Control.
- *10. Environmental Safe Standard : RoHS

| | | |
|-----------|------------------------|--------------|
| C | | |
| B | | |
| A | | |
| Rev/Note | | Date |
| Dwg Title | LM19264ACW Outline Dwg | |
| Dwg No. | MK-001929-1-1 | Date |
| | | 2007-08-24 |
| Scale | Tol. | Unit |
| 2/1 | ±0.5 | mm |
| Approved | Checked | Paper Size |
| | | A3 |
| | | Drawn |
| | | Zhou Huifang |

TOPWAY