



Terminal No.	Pin Name
1	VSS
2	VDD
3	V0
4	/WR
5	/RD
6	/CS
7	A0
8	/RST
9	DB0
10	DB1
11	DB2
12	DB3
13	DB4
14	DB5
15	DB6
16	DB7
17	BLA
18	VOUT

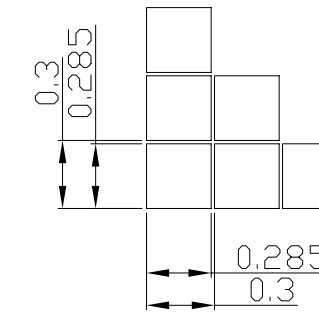


Pixels Details
Scale=30/1

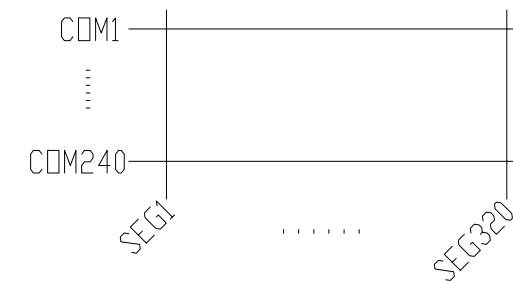

Wiring Details(Top View)
Scale=Free

Note:

- *1. Display Type : FSTN, Positive, Transmissive
- *2. Viewing Direction : 6H
- *3. Duty : 1/240, Bias : 1/14
- *4. Backlight Color : White
- *5. Backlight Supply : 170mA(3.3V TYP.)
- *6. Operating Voltage : 3.3V Δ
- *7. Operating Temperature : -20°C~70°C
- *8. Storage Temperature : -30°C~80°C
- *9. An external VR(25K to 50K) must be connected for Contrast Control
- *10. LCD Controller : S1D13700 or equivalent

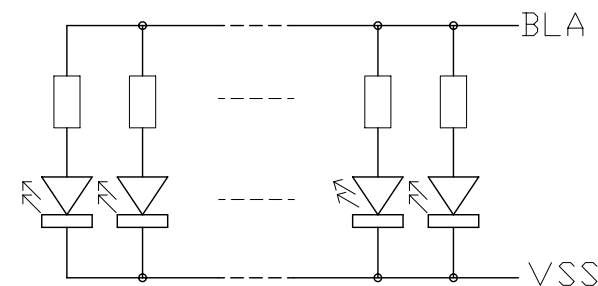

Backlight Circuit
(No. of LEDs = 10pcs)
Scale=free

C		
B		
A	Revise Operating Conditaon	Zhou Huifang 2008-05-10
Rev/Note		Date
Dwg Title	LM320240CCW Outline Dwg	
Dwg No.	MK-002375a-1-1	Date 2008-04-08
Scale	6/5	Tol. ±0.5
Unit	mm	Paper Size A3
Approved	Checked	Drawn Zhou Huifang

TOPWAY