


OUTLINE DRAWING

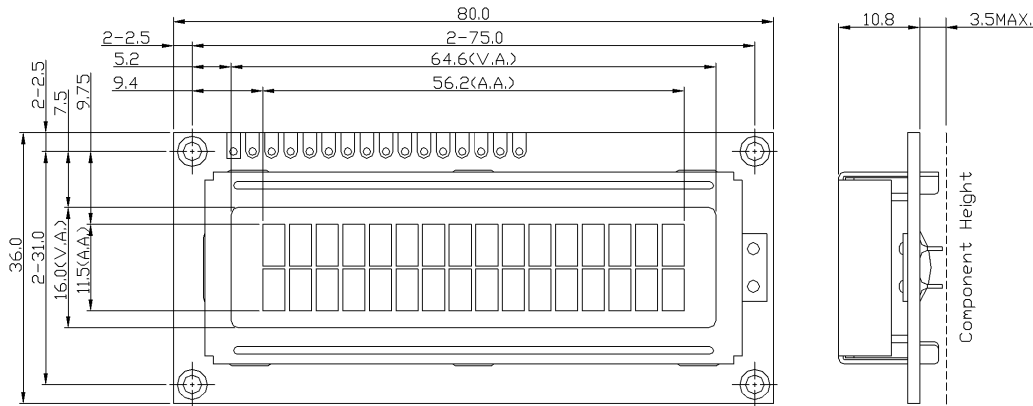

FEATURES

- 16x2 Characters
- Parallel interface
- 3.3v or 5v power supply optional
- STN-YG, STN-Gray, STN-blue, FSTN-Neg with YG or White LED backlight optional

MECHANICAL DATA

Item	Value
Outline (mm)	80.0 x 36.0 x 14.3MAX.
Viewing Area (mm)	64.6 x 16.0
Active Area (mm)	56.2 x 11.5
Character Size (mm)	2.95 x 5.55

TERMINAL FUNCTIONS

Pin	Name	Descriptions
1	VSS	0V Power Supply, Ground
2	VDD	Positive Power Supply
3	V0	LCD Contrast Reference Supply
4	RS	Register Select RS=HIGH: Transferring Display Data RS=LOW: Transferring Instruction Data
5	R/W	Read/Write Control Bus R/W=HIGH: Read Mode Selected R/W=LOW: Write Mode Selected
6	E	Data Enable
7	DB0	Bi-directional Tri-state Data Bus
:	:	
14	DB7	
15	BLA	LED Backlight Positive Power Supply
16	BLK	LED Backlight Negative Power Supply

DISPLAY CHARACTERISTICS

Item	Value
LCD Display Mode	STN-YG, Positive, Transflective
Viewing Angle	6:00
Driving Method	1/16 duty, 1/5 bias
Backlight	YG LED Backlight

ELECTRICAL CHARACTERISTICS

Item	Symbol	Min	Typ	Max
Operating Voltage (V)	V_{DD}	4.7	5.0	5.3
Input High Voltage (V)	V_{IH}	$0.8V_{DD}$	-	V_{DD}
Input Low Voltage (V)	V_{IL}	V_{SS}	-	0.5
Operating Current (mA)	I_{DD}	-	1.3	3.0

TEMPERATURE CHARACTERISTICS

Item	Symbol	Min	Max
Operating Temperature (°C)	T_{OP}	-20	+70
Storage Temperature (°C)	T_{ST}	-30	+80

BACKLIGHT CHARACTERISTICS

Item	Symbol	Min	Typ	Max
Forward Voltage (V)	V_{fBLA}	-	4.9	-
Forward Current (mA)	I_{fBLA}	-	-	150

MAJOR PRODUCT LIST

Models	Highlight		
	LCD Mode	Backlight	Voltage
LMB162ABC★	STN-YG	YG-LED	5V
LMB162ADC	STN-Gray	White-LED	5V
LMB162ADW-0R	STN-Gray	White-LED	5V
LMB162AFC	STN-Blue	White-LED	5V
LMB162AFC-2	STN-Blue	White-LED	3.3V
LMB162AGC-1	FSTN-Neg	White-LED	5V

For similar product or (semi) custom made LCD module, Please visit our web site or contact us.

★The above product information is based on this model