


K2 Terminal	
No	Pin Name
1	TMDS_D2+
2	TMDS_D2 Shield
3	TMDS_D2-
4	TMDS_D1+
5	TMDS_D1 Shield
6	TMDS_D1-
7	TMDS_D0+
8	TMDS_D0 Shield
9	TMDS_D0-
10	TMDS_Clock+
11	TMDS_Clock Shield
12	TMDS_Clock-
13	NC
14	NC
15	SCL_HDMI
16	SDA_HDMI
17	GND
18	+5V_Power
19	Hot_Plug_Detect

K1 Terminal	
No	Pin Name
1	VDD
2	VDD
3	NC
4	NC
5	VSS
6	VSS

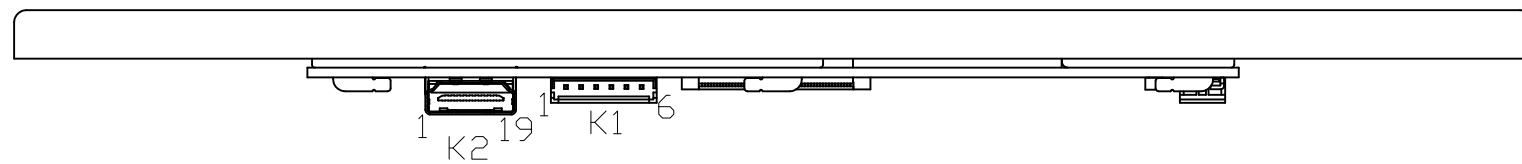

Note:

- \*1. LCD Display Type: SFT.Transmissive
- \*2. Pixel Arrangement: RGB-STRIPE
- \*3. Color Depth : 16.7M Colors
- \*4. Operating Voltage : 11.0~26.0V
- \*5. Backlight: White LED
- \*6. Interface: HDMI
- \*7. Terminal:
  - K1: 6Pin P2.5, JST-S6B-EH or equivalent
  - K2: 19Pin, HDMI A TYPE
- \*8. Operating Temperature : -20°C~70°C
- \*9. Storage Temperature : -30°C~80°C
- \*10. Unmarked Tolerance : ≤150,±0.3; >150,±0.5

Rev	Note	Date
Dwg Title LMT10ENMFWD-ACN Outline Dwg		
Dwg No.	MK-006703-1-1	Date 2019-08-05
Scale 1/1	Tol.	Unit mm Paper Size A3
Approved	Checked	Drawn HeHongLiang

**TOPWAY**